



INDULINE 67


PLASTIC LUMINAIRE WITH IP67 PROTECTION FOR SPECIAL ENVIRONMENTS

The INDULINE67 is a high-performance industrial LED luminaire designed for environments with elevated humidity, impact, and corrosion demands. With its IP67 ingress protection and IK10 impact resistance, it ensures reliable operation in active and challenging industrial or infrastructure applications.

Constructed with stainless steel clips and a durable housing, INDULINE67 performs exceptionally well in highly corrosive environments, such as food processing plants, transport hubs, or chemical facilities. For outdoor use, it's equipped with a breathing valve that protects internal components from condensation and temperature fluctuations, ensuring long-term reliability.

Installation efficiency is at the core of INDULINE67's design. The luminaire offers multiple mounting and wiring options — including adjustable wire, ceiling or wall installation, 1-phase or 3-phase single-end or through-wiring, and fast-connection tool-less connectors (IP66) or Wieland IP67/68 systems. It can also be delivered pre-wired with quick connectors for effortless installation and maintenance.

Electronically, the INDULINE67 features heavy-duty linear drivers with optional DALI control. Additional smart functions, such as corridor mode, motion sensors, or Bluetooth wireless control, are available on request, making it a versatile and future-ready lighting solution for demanding industrial environments.

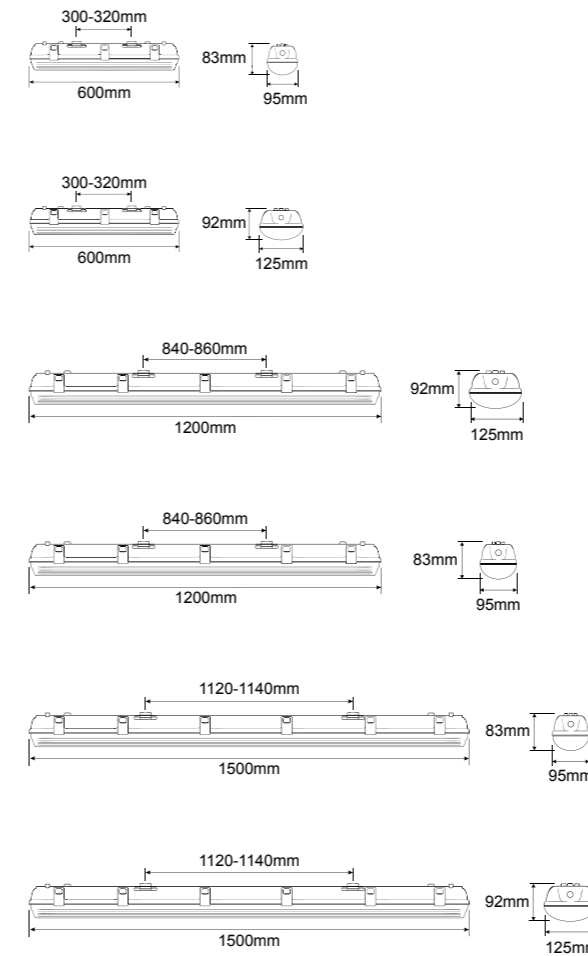

Description	Values
Power	40 W - 100 W
Luminous flux	6 000 - 14 500 lm
Efficacy	Up to 150 lm/W
Correlated color temperature	4000 K (others on request)
CRI	Ra 80 (90 optional)
Light source	Integrated LED module
Housing	Grey polycarbonate (PC), UV-stable
RAL	RAL 9006 standard, other RAL on request
Material cover	Polycarbonate
Screws	Polyamide + stainless steel (clips)
Driver	DALI dimmable driver option
Electrical Class	Class I or Class II
Input voltage	220-240 V AC, 50-60 Hz
Surge protection	Up to 4 kV (L/N - PE)
Functions	DALI-2 dimmable
Connection	Through-wiring up to 10 wires (1F, 3F, 3F M3hAt)
Lifetime	50 000 h (L90B10), 100 000 h (L80B10)
Ambient temperature	-25 °C to +50 °C
IP Rating	IP67
IK Rating	IK10
Weight	4 / 4,4 kg
Certificates	CE, UKCA, HACCP
Warranty	5 years