


STEEL SPORT

Installation manual

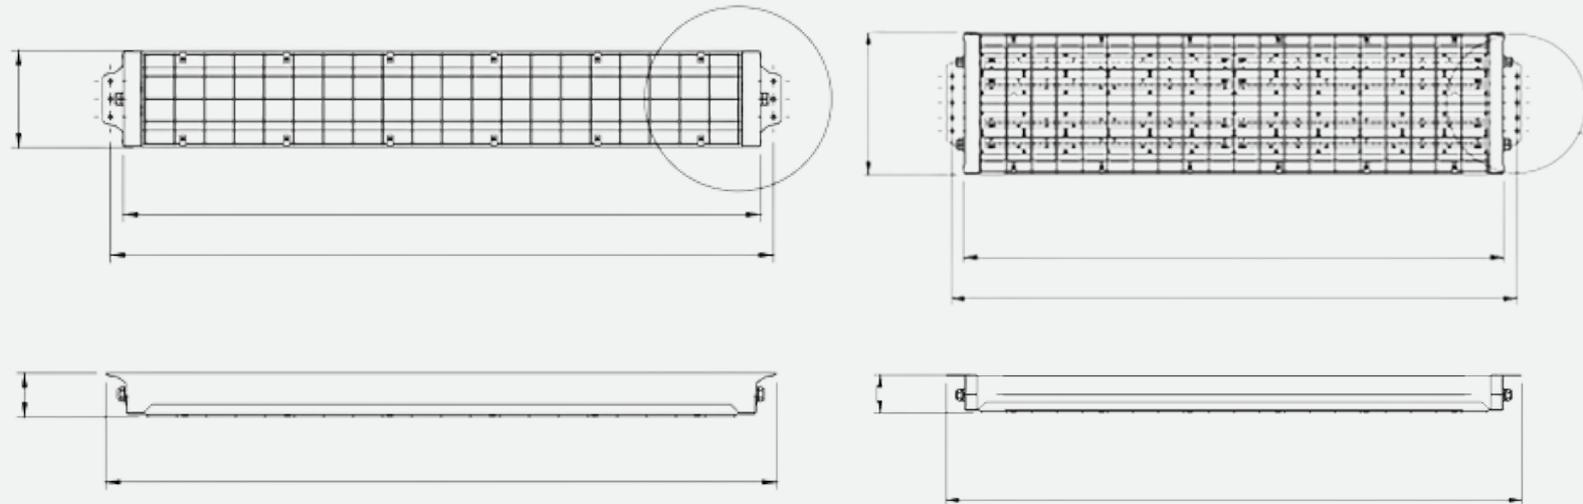


	STEEL SPORT S	STEEL SPORT L
Luminous flux	up to 12560 lm	up to 26100 lm
Consumption	up to 80 W	up to 160 W
Input voltage	AC198-264V 50/60 Hz	
CCT, CRI	CCT 3000K/4000K; RA>80	
Dimensions	1310 x 189 x 85 mm	1305 x 326 x 87 mm
Net weight	6.2 kg	11 kg
Ambient temperature range	-10° +50° C	
Ambient humidity range	15%~90%RH	


STEEL SPORT

Mounting


Unscrew the screws

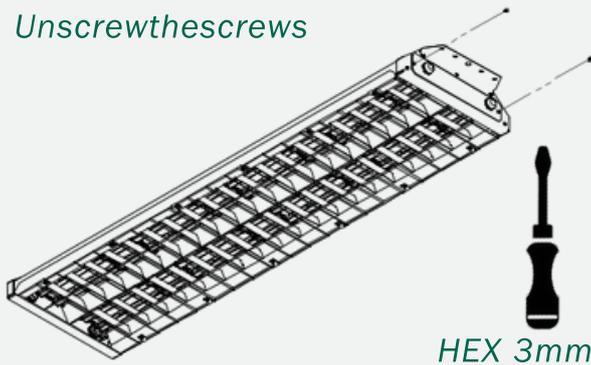


Remove panel

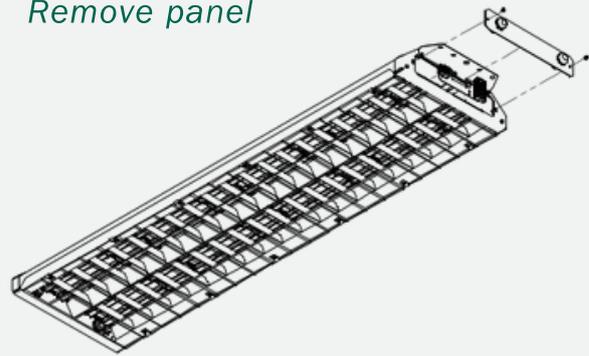


Pull out connection terminal

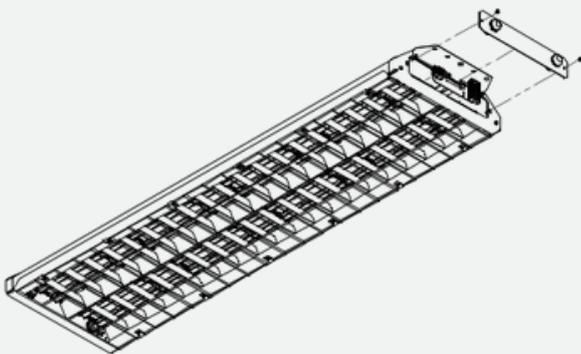

Connection terminal

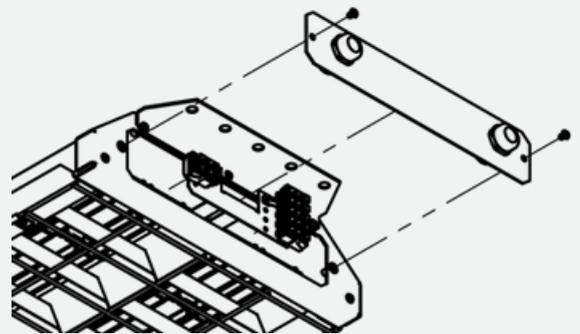


Main connection terminal




- N = Neutral / Neutral through
- ⊕ = Protective Earth / PE through
- L1 = Line / Line through
- L2 = Line through
- L3 = Line through

Through wiring scheme

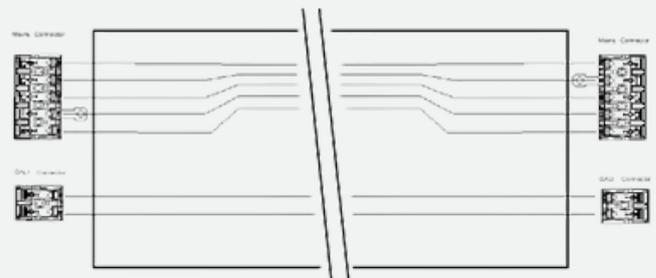


DALI connection terminal




- DALI = DALI line / DALI through
- DALI = DALI line / DALI through

Re-install panel

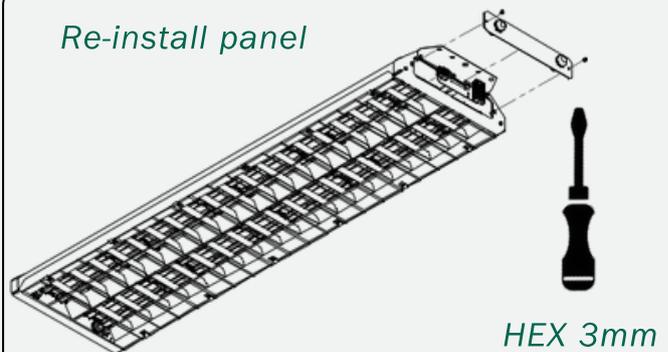


STEEL SPORT

STEEL SPORT S

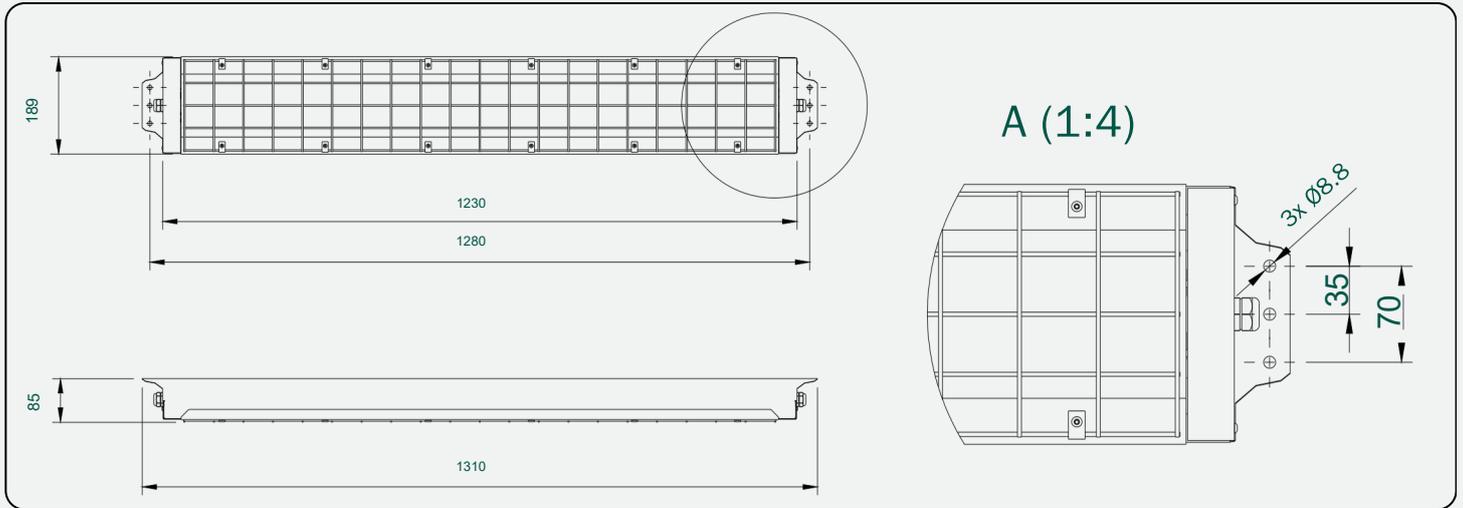

STEEL SPORT L

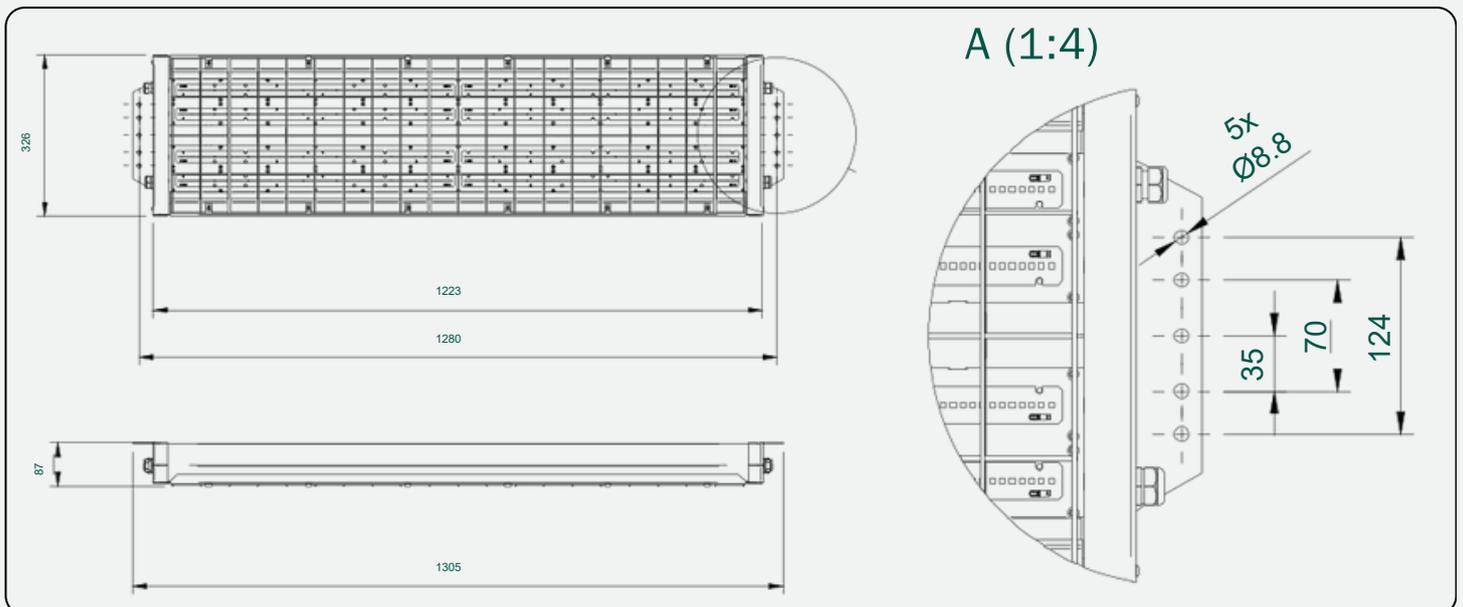

SAFETY AND INSTALLATION INSTRUCTIONS Read these instructions carefully before commencing installation and retain for future reference. The luminaire should be installed by a licensed electrician and in accordance with local regulations. Make sure that the power is off before installation or maintenance. Install as described in this manual. **To maximize life span, install the luminaires and the drivers as far away from heat sources as possible and in a well ventilated area.** Use the supplied cable and driver for best function and safety.

NOTE: The light source in this luminaire may only be replaced by the manufacturer or by qualified personnel designated by the manufacturer. Never regulate the power on the secondary side, this can damage or destroy the LED. Faulty installation may void warranty. When installing in wet areas, the driver must be placed in a dry zone.