




Steel Sport

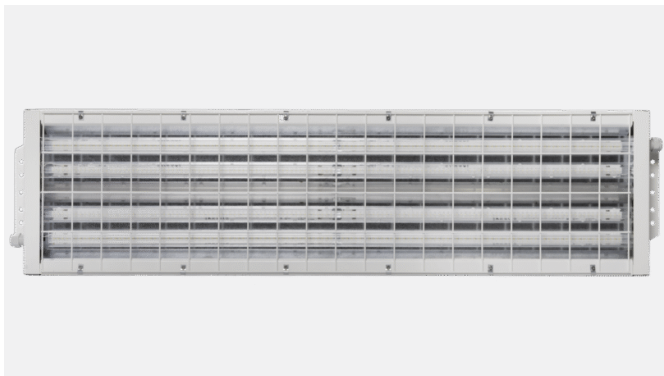

SSL,145,S0013,830

Product ID	SSL145S0013830NET
EPD available	No
Certificates	ENEC, Balltest
MinTa in °C	-10
MaxTa in °C	50
IP rating	IP23
IK rating	IK10
Corrosion class	C2
Electrical class	Class I, Class II
Leakage current (mA)	< 0.250 mA
Voltage range (V)	198 - 264
Frequency range (Hz)	50 - 60
Total power consumption (W)	145
Power factor	0.95
PstLM	<1
SVM	<0.4
THD	<8
Surge protection (kV)	Up to 4kV (L/N - PE)
Driver type	On/Off
Dimming capability	No dimming
Driver options	Tridonic, *Other on demand
Number of drivers	1
Luminous flux from luminaire (lm)	22830
Efficacy (lm/W)	157
Color temperature (K)	3000
CRI (Color Rendering Index)	80
McAdam steps	3
Optic type	Symmetric 68°x96°
Optic code	S0013
Energy class of light source	D
LED lifetime L90B10 Ta25 (h)	70000

Steel Sport

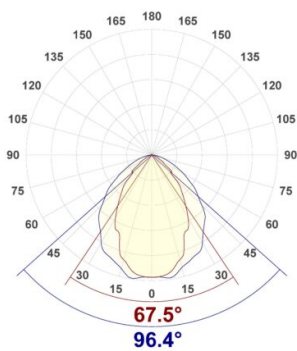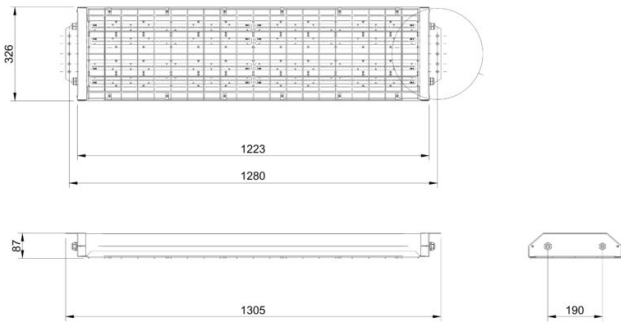

LED lifetime L80B10 Ta25 (h)	100000
Luminous flux decline (LLMF) 50.000h Ta25	L90
Warranty period	5 years
Serviceability	LED module and driver are replaceable by installer
Main housing material	Steel
Housing color code / name	White, Steel
Finish / Coating type	Powder coating
Product Mounting	ceiling surface
Cable type	Not included
Length (mm)	1305
Width (mm)	326
Height (mm)	87
Net weight (kg)	11
Full product weight (kg)	12
Recommended installation height in m	9-11m

