GEO Floodlight

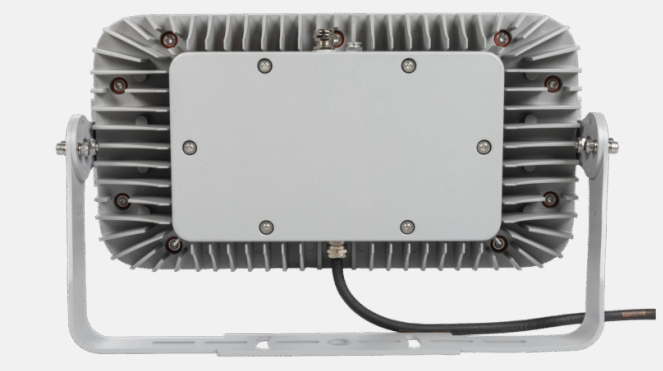

GFL,400,Y436,740,M1

Product ID	GFL400Y436740
EPD available	Yes
MinTa in °C	-40
MaxTa in °C	40
IP rating	IP66
IK rating	IK08
Corrosion class	C4
Electrical class	Class I, Class II
Leakage current (mA)	< 0.70 mA
Voltage range (V)	198 - 264
Frequency range (Hz)	50 - 60
Total power consumption (W)	400
Power factor	0.95
PstLM	<1
SVM	<0.4
THD	<8
Surge protection (kV)	Up to 10kV (L/N - PE)
Driver type	On/Off, DALI2, D4i
Dimming capability	No dimming
Driver options	Inventronics, *Other on demand
Number of drivers	1
Luminous flux from luminaire (lm)	65350
Efficacy (lm/W)	163.4
Color temperature (K)	4000
CRI (Color Rendering Index)	70
McAdam steps	3
Optic type	Symmetric 29°x98°
Optic code	Y436
Energy class of light source	C
LED lifetime L90B10 Ta25 (h)	100000
LED lifetime L80B10 Ta25 (h)	110000

GEO Floodlight

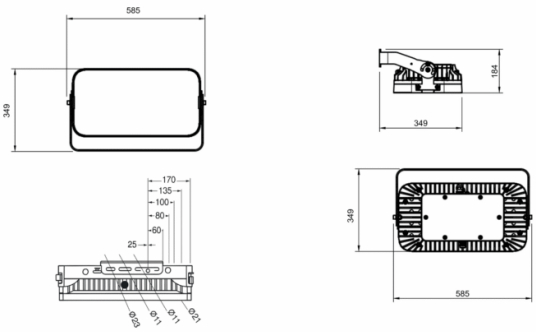

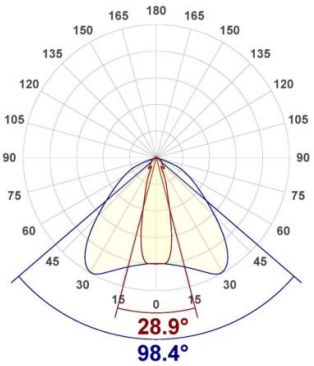

LED lifetime L95B10 Ta25 (h)	50000
Luminous flux decline (LLMF) 50.000h Ta25	L95
Warranty period	5 years
Serviceability	LED module and driver are replaceable by installer
Main housing material	Aluminium
Housing color code / name	Grey (RAL 9006)
Finish / Coating type	Powder coating
Diffuser design	Transparent
Product Mounting	ceiling surface, wall surface, mast
Cable type	H05RR-F 3x1,0mm2
Length (mm)	585
Width (mm)	349
Height (mm)	184
Net weight (kg)	16
Full product weight (kg)	17.2
Recommended installation height in m	14-16m