





FXTL,71,DPC,840

| | |
|---|-------------------------|
| Product ID | FXTL71DPC840 |
| EPD available | No |
| MinTa in °C | -25 |
| MaxTa in °C | 60 |
| IP rating | IP66 |
| IK rating | IK10 |
| Electrical class | Class I |
| Voltage range (V) | 220 - 240 |
| Frequency range (Hz) | 50 - 60 |
| Total power consumption (W) | 71 |
| Power factor | 0.95 |
| PstLM | <1 |
| SVM | <0.4 |
| THD | <8 |
| Surge protection (kV) | 2 kV |
| Driver type | On/Off |
| Dimming capability | No dimming |
| Driver options | Osram, *Other on demand |
| Number of drivers | 1 |
| Luminous flux from luminaire (lm) | 11330 |
| Efficacy (lm/W) | 160 |
| Color temperature (K) | 4000 |
| CRI (Color Rendering Index) | 80 |
| McAdam steps | 3 |
| Optic type | Symmetric 105°x124° |
| Optic code | DPC |
| Energy class of light source | D |
| LED lifetime L90B10 Ta25 (h) | 85000 |
| LED lifetime L80B10 Ta25 (h) | 100000 |
| Luminous flux decline (LLMF) 50.000h Ta25 | L90 |
| Warranty period | 5 years |



| | A | D |
|---|------|-----|
| M | 1172 | 700 |
| L | 1452 | 940 |

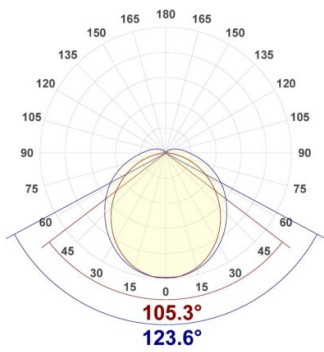

| | |
|--------------------------------------|--|
| Serviceability | LED module and driver are replaceable by installer, Toolless opening |
| Main housing material | Polycarbonate |
| Housing color code / name | Grey (RAL 9006) |
| Diffuser design | Transparent |
| Product Mounting | ceiling surface, wall surface |
| Cable type | Not included |
| Length (mm) | 1452 |
| Width (mm) | 145 |
| Height (mm) | 111 |
| Net weight (kg) | 3.2 |
| Full product weight (kg) | 4.9 |
| Recommended installation height in m | 7-8m |

