




AUM,53,DPC,840

| | |
|---|-------------|
| Product ID | AUM53DPC840 |
| EPD available | No |
| MinTa in °C | -25 |
| MaxTa in °C | 40 |
| IP rating | IP69 |
| IK rating | IK10 |
| Electrical class | Class I |
| Voltage range (V) | 220 - 240 |
| Frequency range (Hz) | 50 - 60 |
| Total power consumption (W) | 53 |
| Power factor | 0.95 |
| PstLM | <1 |
| SVM | <0.4 |
| THD | <8 |
| Surge protection (kV) | 2 kV |
| Driver type | On/Off |
| Dimming capability | No dimming |
| Number of drivers | 1 |
| Luminous flux from luminaire (lm) | 8440 |
| Efficacy (lm/W) | 160 |
| Color temperature (K) | 4000 |
| CRI (Color Rendering Index) | 80 |
| McAdam steps | 3 |
| Optic type | Symmetric |
| Optic code | DPC |
| Energy class of light source | D |
| LED lifetime L90B10 Ta25 (h) | 50000 |
| LED lifetime L80B10 Ta25 (h) | 100000 |
| Luminous flux decline (LLMF) 50.000h Ta25 | L90 |
| Warranty period | 5 years |

Serviceability LED module and driver are replaceable by installer, Toolless opening

Aurora

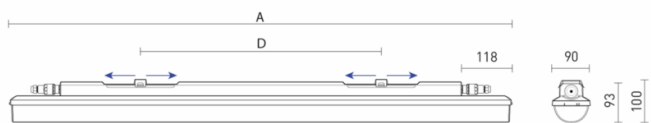

| | A | D |
|---|------|---------|
| M | 1175 | 420-700 |
| L | 1495 | 700-980 |

| | |
|--------------------------------------|-------------------------------|
| Main housing material | Polycarbonate |
| Housing color code / name | Grey (RAL 9006) |
| Diffuser design | Translucent |
| Product Mounting | ceiling surface, wall surface |
| Cable type | Not included |
| Length (mm) | 1175 |
| Width (mm) | 90 |
| Height (mm) | 100 |
| Net weight (kg) | 1.6 |
| Full product weight (kg) | 2.6 |
| Recommended installation height in m | up to 6m |

