




AUL,33,DPC,840

Product ID	AUL33DPC840
EPD available	No
MinTa in °C	-25
MaxTa in °C	45
IP rating	IP69
IK rating	IK10
Electrical class	Class I
Voltage range (V)	220 - 240
Frequency range (Hz)	50 - 60
Total power consumption (W)	33
Power factor	0.95
PstLM	<1
SVM	<0.4
THD	<8
Surge protection (kV)	2 kV
Driver type	On/Off
Dimming capability	No dimming
Number of drivers	1
Luminous flux from luminaire (lm)	5250
Efficacy (lm/W)	158
Color temperature (K)	4000
CRI (Color Rendering Index)	80
McAdam steps	3
Optic type	Symmetric
Optic code	DPC
Energy class of light source	D
LED lifetime L90B10 Ta25 (h)	50000
LED lifetime L80B10 Ta25 (h)	100000
Luminous flux decline (LLMF) 50.000h Ta25	L90
Warranty period	5 years

Serviceability LED module and driver are replaceable by installer, Toolless opening

Aurora

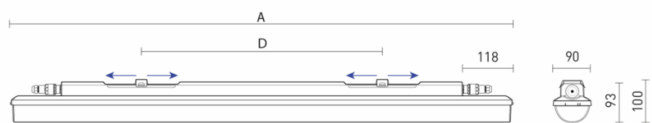

	A	D
M	1175	420-700
L	1455	700-980

Main housing material	Polycarbonate
Housing color code / name	Grey
Diffuser design	Translucent
Product Mounting	ceiling surface, wall surface
Cable type	Not included
Length (mm)	1455
Width (mm)	90
Height (mm)	100
Net weight (kg)	1.8
Full product weight (kg)	2.8
Recommended installation height in m	up to 6m

