Luna

LRO,14,DPC,840

Product ID	LRO14DPC840
EPD available	No
MinTa in °C	-25
MaxTa in °C	35
IP rating	IP54
IK rating	IK10
Electrical class	Class I
Voltage range (V)	220 - 240
Frequency range (Hz)	50 - 60
Total power consumption (W)	14
Power factor	0.95
PstLM	<1
SVM	<0.4
THD	<8
Surge protection (kV)	2 kV
Driver type	On/Off
Dimming capability	No dimming
Number of drivers	1
Luminous flux from luminaire (lm)	1790
Efficacy (lm/W)	131
Color temperature (K)	4000
CRI (Color Rendering Index)	80
McAdam steps	3
Optic type	Symmetric
Optic code	DPC
Energy class of light source	E
LED lifetime L90B10 Ta25 (h)	50000
LED lifetime L80B10 Ta25 (h)	100000
Luminous flux decline (LLMF) 50.000h Ta25	L90
Warranty period	5 years
Serviceability	LED module and driver are replaceable by installer

Luna

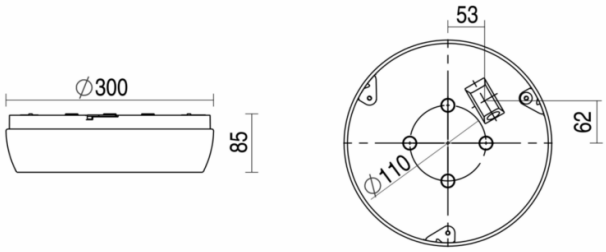

Main housing material	Polycarbonate
Housing color code / name	White
Diffuser design	Translucent
Product Mounting	ceiling surface, wall surface
Cable type	Not included
Length (mm)	300
Width (mm)	300
Height (mm)	85
Net weight (kg)	1
Full product weight (kg)	2

CE UKCA WARRANTY 5 IK10 IP54 E A G